

# USB 1.1 RV2850

## 2-Port USB 1.1 85m\* CAT 5e/6/7 Extender System

# Quick Start Guide


### Product Contents:

- USB 1.1 RV2850 Local Extender
- USB 1.1 RV2850 Remote Extender
- USB Cable
- Quick Start Guide




Before you get started, ensure that all the drivers required for your USB device(s) are installed.

- 1** Place units where desired and connect the CAT 5e/6/7 (solid core) extension link cable to the Link ports (RJ45) on the local extender and remote extender units.

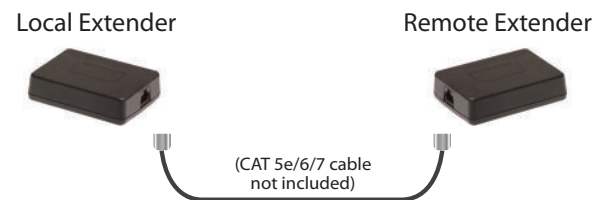

**\*Maximum Cable Range:**  
Full-Speed and Low-Speed: up to 40m (131 ft)  
Low-Speed HID Devices: up to 85m (279 ft)

- 2** Connect the local extender to your computer using the included USB cable.

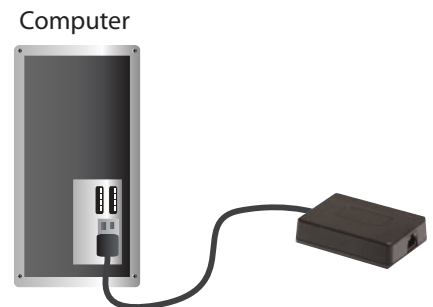

- 3** Attach USB device(s) to the remote extender.



# Certification and Compliance

## **FCC Radio Frequency Interference Statement Warning**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received including interference that may cause undesired operation.

## **CE Statement**

We, Icron Technologies Corporation, an Analog Devices brand, declare under our sole responsibility that the Icron USB 1.1 RV2850, to which this declaration relates, is in conformity with European Standards EN 55024, EN 55032, EN 61000, and RoHS Directive 2011/65/EU + 2015/863/EU.

## **Industry Canada Statement**

This Class B digital apparatus complies with Canadian ICES-003.

CAN ICES-3 (B) / NMB-3 (B)

## **WEEE Statement**

The European Union has established regulations for the collection and recycling of all waste electrical and electronic equipment (WEEE). Implementation of WEEE regulations may vary slightly by individual EU member states. Please check with your local and state government guidelines for safe disposal and recycling or contact your national WEEE recycling agency for more information.

## **Product Operation and Storage**

Please read and follow all instructions provided with this product and operate for intended use only. Do not attempt to open the product casing as this may cause damage and will void warranty. When not in use, product should be stored in a dry location between -20°C and 70°C.

Icron Technologies Corporation  
An Analog Devices Brand  
4664 Lougheed Hwy., Suite 221  
Burnaby, BC  
V5C 5T5, Canada  
+1 604 638 3920



Copyright © 2021 Icron | An Analog Devices Brand.  
All rights reserved. Information contained herein is  
subject to change without notice. ♻️



90-01049-D01