

USB 2.0 Ranger® 2304

4-Port USB 2.0 100m CAT 5e/6/7 Extender System

The USB 2.0 Ranger 2304 is the latest in a long line of reliable point-to-point USB 2.0 extender systems from Icron Technologies. It features full device and host support, including newer USB 3.0 compatible devices and controllers, and fast USB 2.0 throughputs.



Features

The Ranger 2304 extends all USB 2.0 peripherals such as flash drives, keyboards, mice, webcams and interactive whiteboards across a dedicated CAT 5e/6/7 connection.


- USB 2.0 throughput up to 480Mbps
- Integrated hub provides ports for four USB devices, use hubs to add more
- Supplies up to 600mA to each USB port concurrently
- Operates with all USB controllers

Includes the ExtremeUSB® suite of features:

- Transparent USB extension
- True plug and play; no software drivers required
- Works with all major operating systems: Windows®, macOS™, Linux® and Chrome OS™

Applications

- Remote storage
- Security and monitoring
- Professional Audio-Visual
- Keyboard and mouse

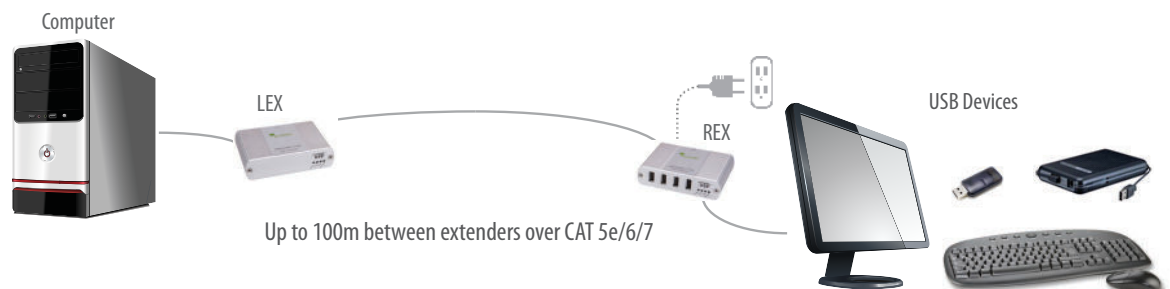

An Analog Devices Brand

4664 Lougheed Hwy.
Suite 221
Burnaby, BC,
V5C 5T5, Canada

www.icron.com
+1 604 638 3920



Specifications subject to change
without notification.
©2022
Icron | An Analog Devices Brand
#90-01097-D01

USB 2.0 Ranger® 2304 Specifications



RANGE

Direct Connect: Up to 100m (330 ft) over solid core CAT 5e/6/7

USB DEVICE SUPPORT

Maximum USB 2.0 Throughput: Up to 480Mbps

Maximum USB 1.1 Throughput: Up to 12Mbps

Traffic Types: All USB 2.0 and 1.1 Traffic Types

Device Types: All USB 2.0 and 1.1 Device Types

LEX (LOCAL EXTENDER)

USB Connector: 1 x USB Type B Receptacle

Link Connector: 1 x RJ45

Dimensions: 100mm x 76mm x 26mm (3.9" x 3.0" x 1.0")

Enclosure Material: Silver Anodized Aluminum

REX (REMOTE EXTENDER)

USB Connectors: 4 x USB Type A Receptacles

Link Connector: 1 x RJ45

Dimensions: 100mm x 76mm x 26mm (3.9" x 3.0" x 1.0")

Enclosure Material: Silver Anodized Aluminum

Available Current: Up to 600mA to each USB port

Power Supply: 100-240V AC Input, 1A 24V DC Output

ENVIRONMENTAL

Operating Temperature: 0°C to 50°C (32°F to 122°F)

Storage Temperature: -20°C to 70°C (-4°F to 158°F)

Operating Humidity: 20% to 80% relative humidity, non-condensing

Storage Humidity: 10% to 90% relative humidity, non-condensing

COMPLIANCE

Certifications: FCC (Class B), CE (Class B), RoHS2/3 (CE), ICES-003 Issue 7, EN 62368-1

SUPPORT

Warranty: 2-year



Ordering Information

The USB 2.0 Ranger® 2304 system includes a LEX, REX, USB Cable, Quick Start Guide, international power adapter with country specific power cord and two-year warranty. For more information, contact us at www.icron.com/contact or call +1 604 638 3920.

| PART # | NAME | DESCRIPTION |
|----------|---------------------------|---|
| 00-00347 | USB 2.0 Ranger® 2304 - NA | 4-Port USB 2.0 100m CAT 5e/6/7 Extender System, 100-240V Power Adapter, NA Power Cord |
| 00-00348 | USB 2.0 Ranger® 2304 - EU | 4-Port USB 2.0 100m CAT 5e/6/7 Extender System, 100-240V Power Adapter, EU Power Cord |
| 00-00349 | USB 2.0 Ranger® 2304 - UK | 4-Port USB 2.0 100m CAT 5e/6/7 Extender System, 100-240V Power Adapter, UK Power Cord |
| 00-00350 | USB 2.0 Ranger® 2304 - AU | 4-Port USB 2.0 100m CAT 5e/6/7 Extender System, 100-240V Power Adapter, AU Power Cord |
| 00-00373 | USB 2.0 Ranger® 2304 - JP | 4-Port USB 2.0 100m CAT 5e/6/7 Extender System, 100-240V Power Adapter, JP Power Cord |