


VU5363 HDMI® + USB 2.0 Extender


HDMI and USB 2.0 100m (330ft) CAT 5e/6/7 KVM Extender System

Quick Start Guide


- 1 Using the included high quality HDMI and USB cables, connect the Local Extender to a computer.

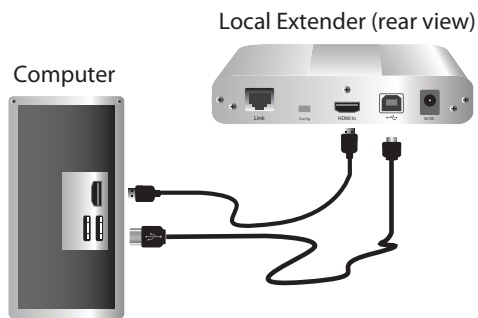


- 2 Connect the Remote Extender to a monitor or TV with a high quality HDMI cable (not included). Connect your USB devices (e.g. keyboard and mouse) to the Remote Extender.

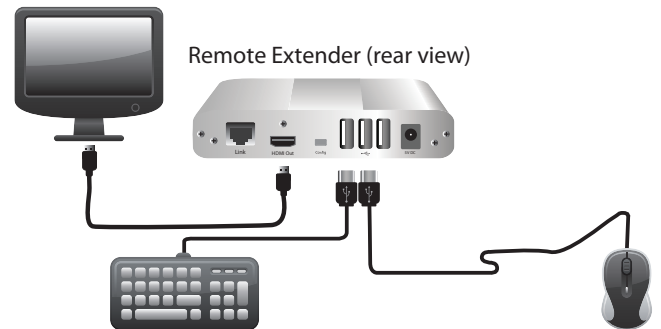


- 3 Directly connect the Local Extender to the Remote Extender with a CAT 5e/6/7 cable (not included). Solid core Cat 6a/7 STP is recommended for best performance (refer to detailed cable information on the back of this page).

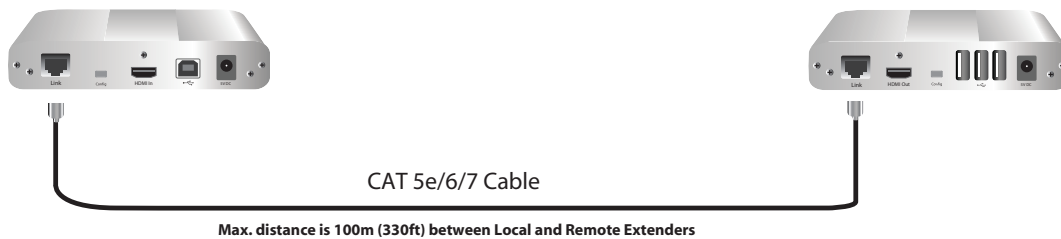

- 4 Power the Local Extender with the included 5V AC adapter.

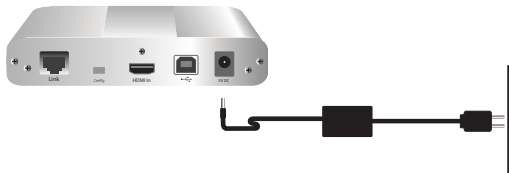

- 5 Power the Remote Extender with the included 5V AC adapter.

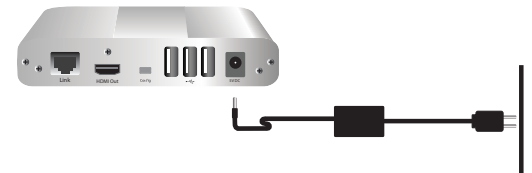

Compatibility and Recommended Set Up

This KVM extender is compatible with many graphics cards, operating systems, monitors and TVs that support High Definition 1080p, 1920 x 1200 and 4K resolution. However, there is no guarantee that all hardware will be compatible as there are many different factors that may impact operation.

HDMI Cables

Ensure high quality, undamaged HDMI cables are used with this product. Low quality or damaged cables may impact product performance and/or result in damage to units.

USB Compatibility

This product complies with the USB Specifications governing the design of USB devices. However, there is no guarantee that all USB devices are compatible with this product as there are a number of different factors that may impact the operation of devices over extended distances.

USB Devices

This product provides up to 40 Mbps of bandwidth for USB devices. Some example USB devices are:

- Mice
- Keyboards
- Mass storage devices
- Printers
- Scanners
- Speakers
- Microphones

Host Operating Systems

- Windows®
- OS X®
- Linux®

Cable Type	Electrical Interference Susceptibility
Solid Core CAT 5e/6 UTP	High
Solid Core CAT 5e/6 STP	Moderate
Solid Core CAT 6a UTP	Moderate
Solid Core CAT 6a STP	Low (Recommended)
Solid Core CAT 7 STP	Low (Recommended)

Note: Maximum distance and product performance may be reduced in the presence of interference or coiled extension cable. If you are using coiled unshielded cabling in your set-up, depending on the quality of the cable and how it is coiled, the maximum distance may be reduced to 50m.

Certification and Compliance

FCC Radio Frequency Interference Statement Warning

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received including interference that may cause undesired operation.

CE Statement

We declare under our sole responsibility that the VU5353, to which this declaration relates, is in conformity with European Standard EN 55022, EN 61000 and EN 55024.

IC Statement

This Class A digital apparatus complies with Canadian ICES-003.



90-01414-A04