

VU5100 DVI + USB 2.0 Extender

DVI and USB 2.0 100m Cat 5e KVM Extender System

Sold as unbranded or private label

The VU5100 extends both DVI and USB 2.0 up to 100m using a single Cat 5e* cable.

4664 Lougheed Hwy.
Suite 221
Burnaby, BC,
V5C 5T5, Canada
icron.com
+1 604 638 3920



Local Extender

Remote Extender

Features

The VU5100 KVM Extender lets you place a computer up to 100m (330 ft) away from the workstation using a single Cat 5e* cable. The system supports full HD video and USB 2.0, providing the ability to control keyboards, mice, flash drives or other USB 2.0** and 1.1 devices.


- Provides full uncompressed 1920 x 1200 resolution HD video
- 24-bit color
- USB 2.0 High-Speed throughput**

Includes ExtremeUSB® suite of features:

- Transparent USB extension
- True plug and play; no software required
- Works with all major operating systems: Windows®, Mac OS X®, and Linux®

Applications

- Medical Extensions
- Interactive Digital Signage
- Security
- Industrial Control

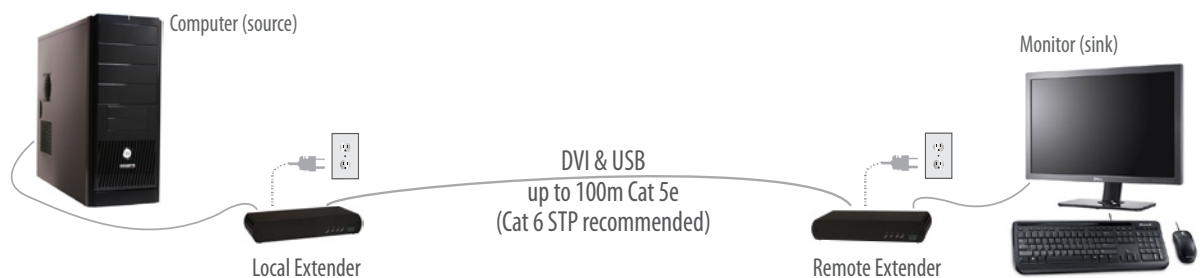

←EXTREME→
USB

Specifications subject to
change without notification.

©2014

Icron Technologies Corp.

#90-01035-A04

* This product supports Cat 5e or better cabling (i.e. Cat 6, Cat 7, etc). All references to "Cat 5e" should be read as "Cat 5e or better".

**USB throughput is limited to 30Mbps. High bandwidth devices may not function properly. USB audio devices not recommended.

VU5100 Specifications



Rear view of local extender (top) and remote extender (bottom)

Cable Type	Electrical Interference Susceptibility
Solid Core Cat 5e UTP	High
Solid Core Cat 5e STP	Moderate
Solid Core Cat 6 UTP	High
Solid Core Cat 6 STP	Low (Recommended)
Solid Core Cat 7 STP	

Note: Maximum distance and product performance will be reduced in the presence of interference or coiled extension cable.

Specifications subject to change without notification.

©2014

Icron Technologies Corp.

#90-01035-A04

RANGE

Direct Connect: Up to 100m (330 ft) over Cat 5e (or better)

VIDEO

Resolution: High Definition 1920 x 1200

Color: 24-bit color depth

Depth: 2D

Latency: Less than 1ms

SPEEDS

USB 2.0: Up to 30Mbps

USB 1.1: Up to 12Mbps

LOCAL EXTENDER

Video Connector: 1 x DVI

USB Connector: 1 x USB Type B Receptacle

Link Connector: 1 x RJ45

Dimensions: 112mm x 175mm x 30mm (4.4" x 6.9" x 1.2")

Enclosure Material: Black Anodized Aluminum

Power Supply: 100-240V AC input, 5V DC output

REMOTE EXTENDER

Video Connector: 1 x DVI

USB Connectors: 3 x USB Type A Receptacles

Link Connector: 1 x RJ45

Dimensions: 112mm x 175mm x 30mm (4.4" x 6.9" x 1.2")

Enclosure Material: Black Anodized Aluminum

Available Current: 500mA for each USB port

Power Supply: 100-240V AC input, 5V DC output

ENVIRONMENTAL

Operating Temperature: 0°C to 40°C (32°F to 104°F)

Operating Humidity: +20% ~ 80% (non condensing)

COMPLIANCE

EMC: FCC (Class A), CE (Class A), ICES-003

Environmental: RoHS2 (CE)

SUPPORT

Warranty: 2 years

Ordering Information

The VU5100 system includes a local extender, remote extender, USB cable, DVI cable, Quick Start Guide, two international power adapters with country specific power cord and two year warranty. For more information email sales@icron.com or call +1 604 638 3920.

PART #	NAME	DESCRIPTION
00-00283	VU5100-NA	Unbranded DVI+USB 2.0 1920x1200 single Cat 5e 100m KVM Extender System, 100-240V Power Adapter, NA Power Cord
00-00284	VU5100-EU	Unbranded DVI+USB 2.0 1920x1200 single Cat 5e 100m KVM Extender System, 100-240V Power Adapter, EU Power Cord
00-00285	VU5100-UK	Unbranded DVI+USB 2.0 1920x1200 single Cat 5e 100m KVM Extender System, 100-240V Power Adapter, UK Power Cord
00-00286	VU5100-AU	Unbranded DVI+USB 2.0 1920x1200 single Cat 5e 100m KVM Extender System, 100-240V Power Adapter, AU Power Cord
00-00287	KVM Mounting Kit	Four Brackets for EL/VU3500, 4500, 5100, 5200