

# USB 3-2-1 Raven™ 3104 Pro

## 4-Port USB 3.2, 100m CAT 6a/7 Point-to-Point Extender System

Sold as unbranded or private label

### USB 3-2-1 Extender over Category Cable Optimized for Camera and Video Capture Devices

The USB 3-2-1 Raven 3104 Pro provides the ability to connect all USB 3.2 Gen 1 (5Gbps) device types and is backwards compatible to USB 2.0 and 1.1 across a point-to-point connection up to 100m over CAT 6a/7. The Raven 3104 Pro also includes an Ethernet pass-through for connecting to network enabled devices or to use existing infrastructure without losing LAN connectivity.



Local Extender

Remote Extender

## Summary of Features


- USB 3.2 Gen 1 data rate up to 5Gbps
- Supports all USB 3.2, 2.0, 1.1 devices simultaneously at full bandwidth
- Four available 3.2 Gen 1 ports
- 100/1000 Ethernet channel; LAN pass-through
- Single cable, CAT 6a/7 up to 100m
- Point-to-point connection
- Supports all USB transfer types (Control, Interrupt, Isochronous and Bulk)
- Optimized for camera and video capture devices
- FCC and CE (Class B) compliant

### Includes the ExtremeUSB-C™ suite of features:

- Transparent USB extension supporting USB 3, 2 and 1
- True plug and play; no software drivers required
- Works with all major operating systems: Windows®, macOS™, Linux® and Chrome OS™

## Applications

- Remote Storage
- Security and Monitoring
- Video Matrix Systems
- Conferencing Cameras

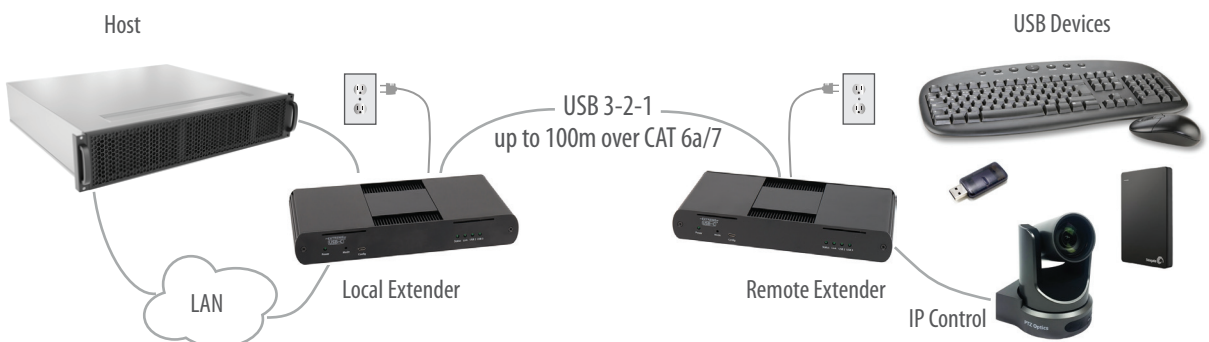

4664 Lougheed Hwy.  
Suite 221  
Burnaby, BC,  
V5C 5T5, Canada

icron.com  
+1 604 638 3920

Specifications subject to change  
without notification.  
©2020  
Icron | A Maxim Integrated Brand  
#90-01743-A02

# USB 3-2-1 Raven 3104 Pro Specifications

LOCAL EXTENDER MECHANICAL DATA	REMOTE EXTENDER MECHANICAL DATA
137.3mm x 232.1mm x 33.0mm (5.4" x 9.1" x 1.3")	137.3mm x 232.1mm x 33.0mm (5.4" x 9.1" x 1.3")
1x USB 3 Type B Receptacle	4x USB 3 Type A Receptacles
1x RJ45 Ethernet 100/1000 Port	1x RJ45 Ethernet 100/1000 Port
1x RJ45 Ethernet Link Port	1x RJ45 Ethernet Link Port
24V 1A DC Locking Jack	24V 2.71A DC Locking Jack
920g (2.03 lbs.)	990g (2.18 lbs.)

PACKAGE CONTENTS	
1x Local Extender	
1x Remote Extender	
1x USB 3.1 Gen 1 Cable	
2x International Locking AC Adapters	
2x Country Specific Power Cords	
1x Quick Start Guide	
Packaged weight: 2.91kg (6.42 lbs.)	

RANGE	
Point-to-Point:	Up to 100m over CAT 6a/7

USB SUPPORT	
USB Speeds:	SuperSpeed 5Gbps, High-Speed, Full-Speed, Low-Speed
USB Bandwidth:	Up to 5Gbps
Device Compatibility:	All Device Types and Classes (Control, Interrupt, Isochronous and Bulk)
Host Compatibility:	OHCI, UHCI, EHCI, xHCI
Available Current at Remote:	1.2A (6W) per USB port
Max Number of USB Devices:	30

ENVIRONMENTAL	
Temperature:	0°C – 50°C (32°F – 122°F) Operating, -20°C – 70°C (-4°F – 158°F) Storage
Humidity:	20-80% Operating, 10-90% Storage Relative Humidity Non-Condensing

SUPPORT	
Warranty:	2 years

## Ordering Information

PART #	NAME	DESCRIPTION
01-00723	USB 3-2-1 Raven 3104 Pro - NA	4-Port Pro USB 3-2-1 100m CAT 6a/7 PTP Extender System, Unbranded Black, 100-240V Power Adapters - NA
01-00724	USB 3-2-1 Raven 3104 Pro - EU	4-Port Pro USB 3-2-1 100m CAT 6a/7 PTP Extender System, Unbranded Black, 100-240V Power Adapters - EU
01-00725	USB 3-2-1 Raven 3104 Pro - UK	4-Port Pro USB 3-2-1 100m CAT 6a/7 PTP Extender System, Unbranded Black, 100-240V Power Adapters - UK
01-00726	USB 3-2-1 Raven 3104 Pro - AU	4-Port Pro USB 3-2-1 100m CAT 6a/7 PTP Extender System, Unbranded Black, 100-240V Power Adapters - AU
01-00727	USB 3-2-1 Raven 3104 Pro - JP	4-Port Pro USB 3-2-1 100m CAT 6a/7 PTP Extender System, Unbranded Black, 100-240V Power Adapters - JP
10-00621	Raven Black Mounting Kit	Raven/Maverick Black Mounting Kit, Set of 2 Mounting Brackets, Bolts included

To order or for more information, email [lcronSales@MaximIntegrated.com](mailto:lcronSales@MaximIntegrated.com) or call +1 604 638 3920.